

## <u>Descanso®</u>

## WIDESPREAD LAVATORY FAUCET

## **Features**


- 5-7/16" spout center to center
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- ∅ 1-1/4" all brass touch style pop up drain assembly
- 1.2 gpm (4.5 L/min) max flow rate All brass construction
- Over 30 finishes including 15 PVD finishes


## Codes/Standards


Product meets or exceeds the following:
• ASME A112.18.1/CSA B125.1

- NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- EPA WaterSense High Efficiency Lavatory
- Commonwealth of MA
- ADA compliant



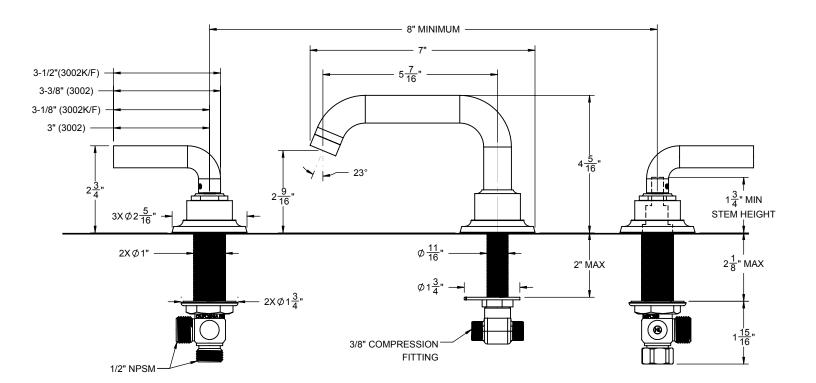





THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMENDED	MAX
SPOUT: Ø1" VALVE: Ø1"	Ø 1-1/8" Ø 1-1/8"	Ø 1-1/2" Ø 1-1/2"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"