

Features


- 1.2 gpm (4.5 L/min) max flow rate
- Single handle operation
- Rough valve (CF-SVLH-R) sold separately
- Solid brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards


Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC
- ADA compliant



CF-TO-V6202-7/9

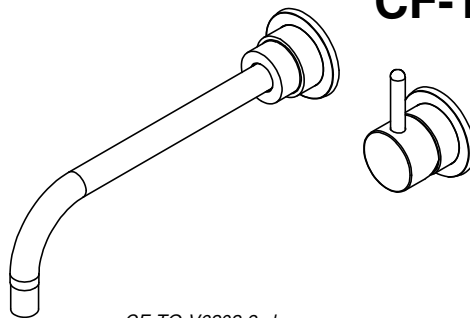

CF-TO-V6202-9 shown

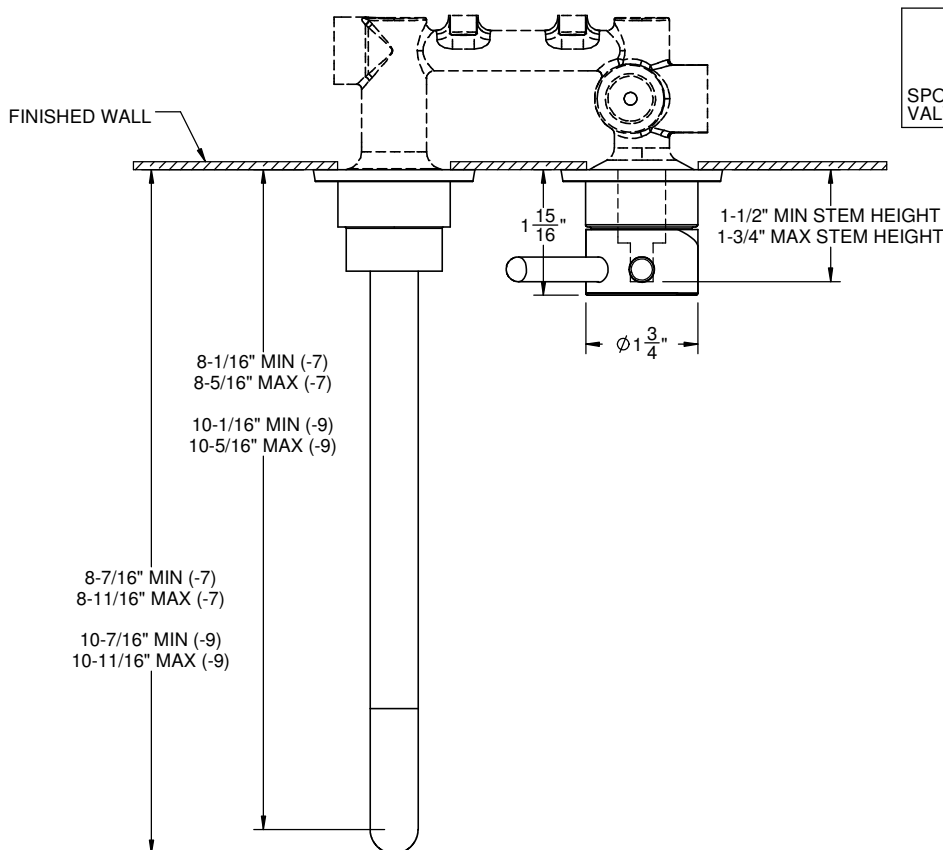

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX
SPOUT: $\varnothing 1\text{-}3/4"$	$\varnothing 1\text{-}3/4"$	$\varnothing 2"$
VALVE: $\varnothing 1\text{-}3/4"$	$\varnothing 1\text{-}3/4"$	$\varnothing 2"$

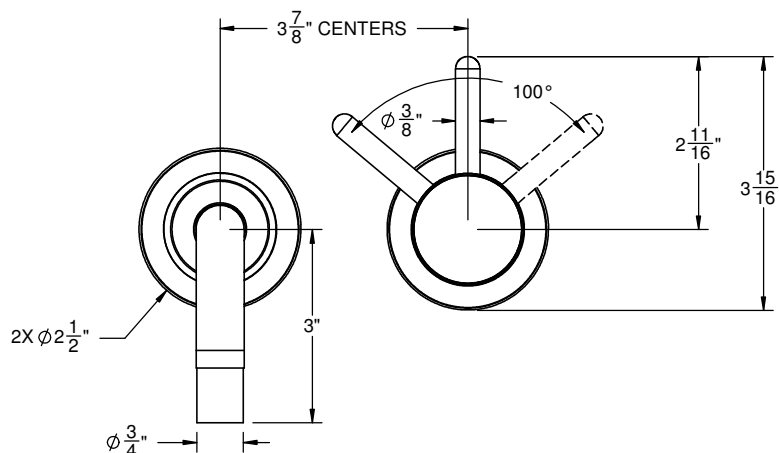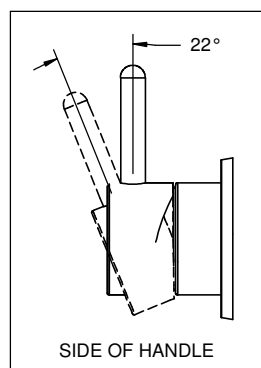

ALL DIMENSIONS SHOWN TO NEAREST 1/16"