



California Faucets®

Tiburon™

WALL LAVATORY


Features

- 1.2 gpm (4.5 L/min) max flow rate
- Rough valve (CF-VL-R) sold separately
- Solid brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards



Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC



CF-TO-V6502-9 shown

CF-TO-V6502-7/9

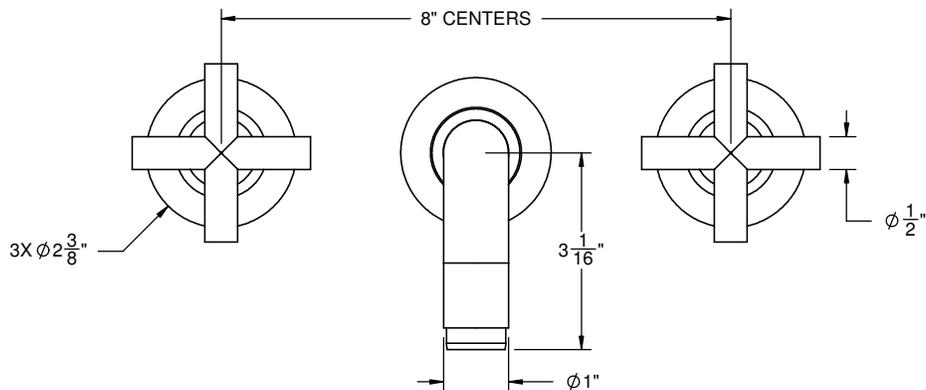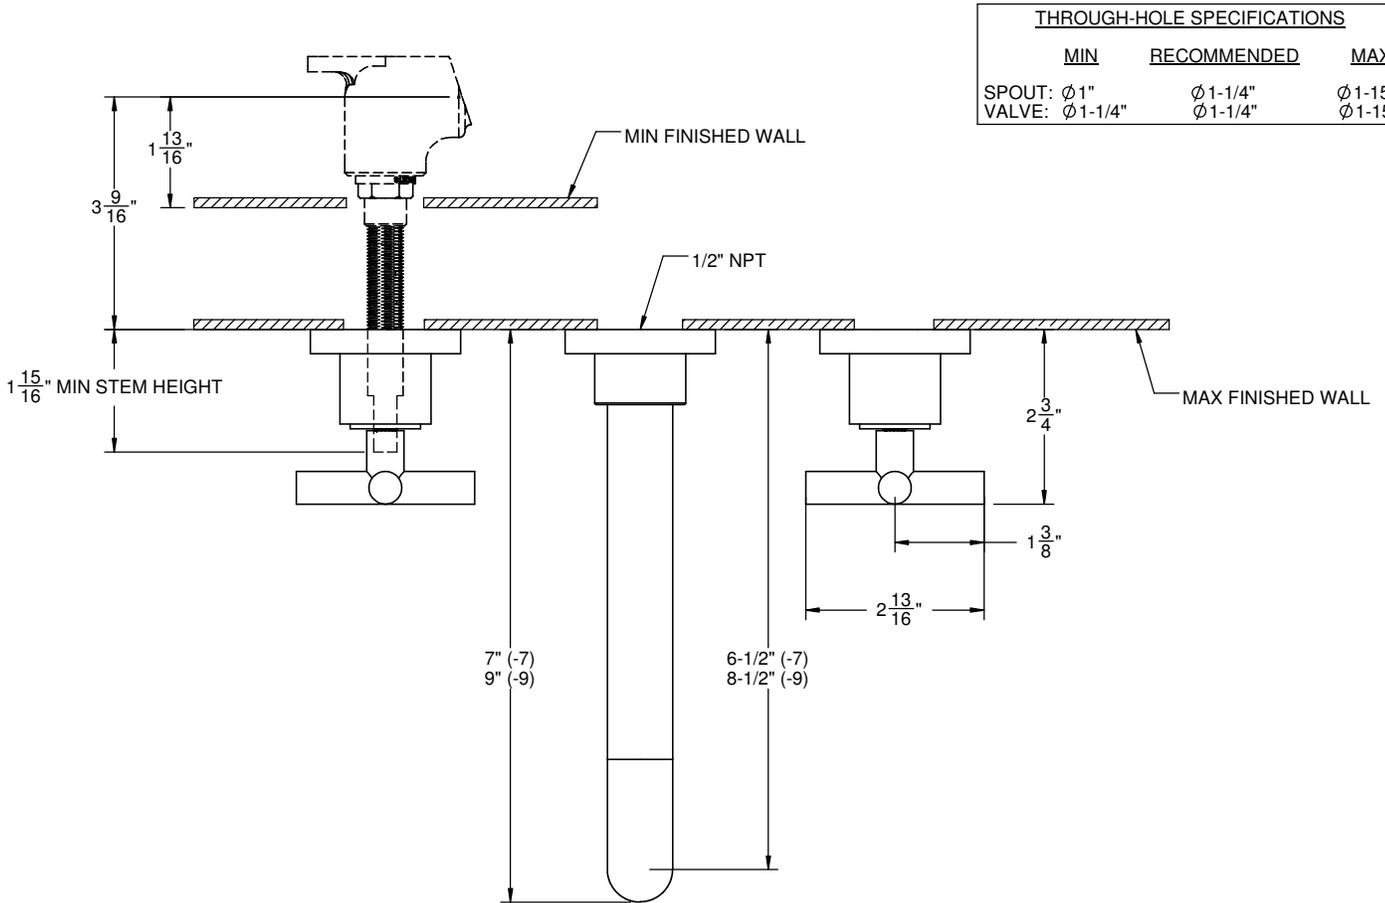

ALL DIMENSIONS SHOWN TO NEAREST 1/16"