EVANESCENCE 5936

59" x 36" x 28" (FREESTANDING)

Evanescence means "state of transformation." The collection is an invitation to turn your relaxation space into a sanctuary of luxury and wellness.



MODEL	тми	TUB	
Freestanding	BEVFOF00T-XX	BEVFOF00N-XX	

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	35
1 heated backrest & headrest	Included
MiaMulti® Control*	Included
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$

TUB Soaker	\$
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy

FEATURES				
Installation type	Installation type		Freestanding	
No. of bathers	*	Imp. gallons		41
US gallons	49	Raised headrest		1
INTEGRATED WASTE & OVERFLOW BOVERINI-XX				
White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10		Installed & Included		
STANDARD COLOR				
White 01				Included

OPTIONS (UPCHARGE APPLICABLE)		
COLOR		
Black / White 66 NEW	\$	
FINISH		
UltraVelour Matte Finish (White only) BVEL	\$	
INTEGRATED WASTE & OVERFLOW BOVERINI-XX		
Matte Black 19, Black Chrome 12, Satin Brass 18	\$	
ISLAND TUB DRAIN™**		
Island Tub Drain™ BISLDD	\$	
Cast Iron Island Tub Drain™ BISLDDCI	\$	
IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED WITH ITD		
Brass waste & overflow kit BDRCOB	\$	
Brass waste kit BDRCB	\$	

- Don't forget to specify the **finish of the integrated waste & overflow**.

 * For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.
 - ** An Island Tub Drain™ is required when there is **no access under** the bath


TOTAL PRICE







INSTALLATION

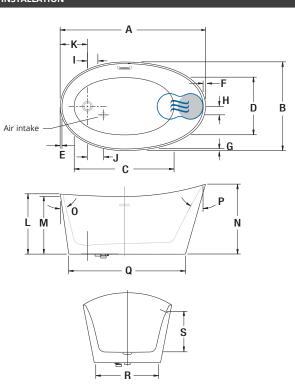

LETTER	DESCRIPTION	MEASURE
Α	Total length	59"
В	Total width	36"
С	Bathing well length	41 1/2"
D	Bathing well width	23 7/8"
E	Deck width at waste end	1"
F	Deck width at headrest	1 1/8"
G	Deck width	1 1/8"
Н	Center TUB waste to air intake	3 1/2"
1	Center TUB waste to waste hole	4 1/4"
J	Center TUB waste to air intake	6 1/2"
K	TUB outside edge to center TUB waste	11"
L	Total height	24 1/2"
М	Minimum height of bath	23 1/2"
N	Total height to headrest	28 1/2"
0	Slope at waste end	12°
P	Slope of backrest	31°
Q	Base length	47 3/8"
R	Base width	26 7/8"
s	Height from waste to center of overflow	16"

- Indicates heated backrest (TMU)

TECHNICAL SP	ECIFICATIONS		
Hot water	Should be 70% of water capacity of TUB or greater.	Cutting template	# 90000069
supply required		Approx. shipping weight	220 lbs
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option ,	Turbine power	550 W
a second line is needed 15 A. 120 V, 60 hz,	a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.	Air heater	600 W
	- Faucet must be freestanding or wall-mounted.	WARRANTY	
Others	- The turbine must be remotely installed .	Controls-LED-Geysair*	5 years
- Controls cannot be installed on the bath.	- Controls cannot be installed on the bath.	Bath & turbine*	20 years
	st be installed by certified professionals only and according to our Owner's Manual as well as federal, nd local building codes and regulations (www.bainultra.com/documentation/documentation).	* Some restrictions apply www.bair	nultra.com/warranty





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.