



Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- 1/4 turn ceramic disc cartridge(s)
- Dual jointed swing spout
- 1/2" FIP inlet for quick connect
- Max flow rate: 4.0 gpm (15.1 L/min) at 60 psi

K51-200-FB
K51-200-BFB
K51-200-ST
K51-200-BST




K51-200-ST shown



Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372
- Commonwealth of MA
- ADA compliant (Lever handles only)

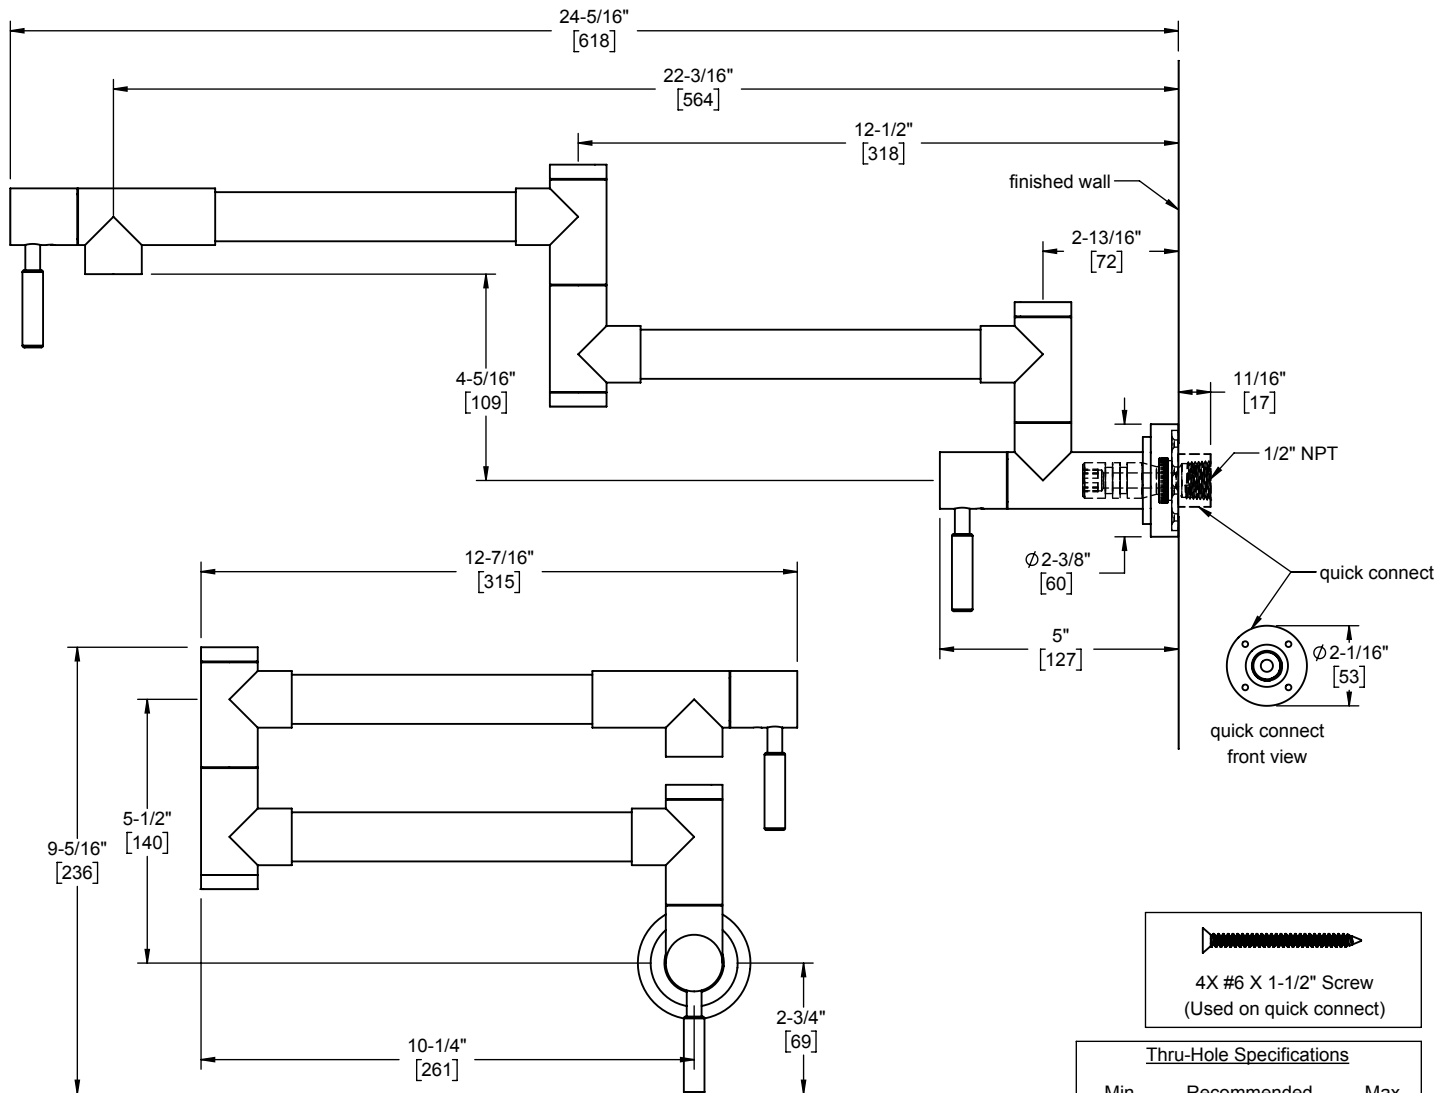

Thru-Hole Specifications		
Min	Recommended	Max
Ø 1-1/8" [29]	Ø 1-1/8" [29]	Ø 1-1/4" [32]