
BATHROOM Sento Floor-Mounted Tub Filler G-6354-LM42N





Information

- Floor-mount installation
- Aerated spout flow rate ~8 gpm @ 45 psi
- Aerated handshower flow rate \leq 1.5 max gpm
- 7-7/8" spout reach
- 30" to 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve



Product Features

- Floor-mount installation
- Aerated flow rate ~ 8 gpm @ 45 psi
- Handshower flow rate ≤ 1.5 max gpm
- 7-7/8" spout reach
- 30" to 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve



Available Finishes


- Polished Chrome
 G-6354-LM42N-PC
- Polished Nickel
 G-6354-LM42N-PN
- Olive Bronze*
 G-6354-LM42N-OB*
- Steelnox ®
 G-6354-LM42N-SN
- Unfinished Brass*
 G-6354-LM42N-UB
- Architectural Black* G-6354-LM42N-BK*
- Architectural White* G-6354-LM42N-WT*
- Brushed Gold*
 G-6354-LM42N-BAU*

* Special order finish- call for availability

Warranty

• Limited lifetime warranty

For complete warranty information go to http://www.graff-designs.com/en/info/faqs

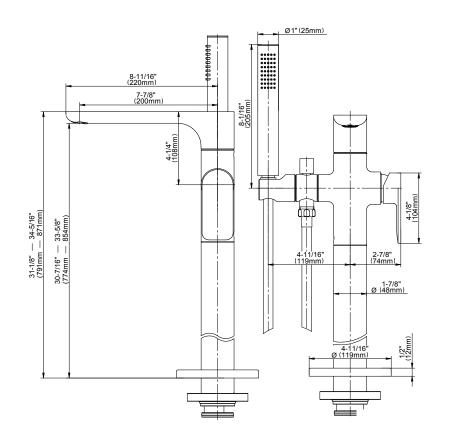





Finishes



Unfinished Brass

Unfinished Architectural Brushed Brass White






Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

Warranty

Limited lifetime warranty

For complete warranty information go to http://www.graff-faucets.com/en/info/faqs

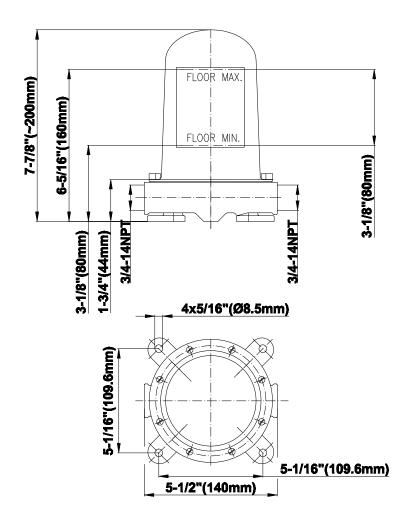

The measurements shown are for reference only. Products and specifications shown are subject to change without notice. Revised 07/2017. <u>www.graff-faucets.com</u> | phone: 800-954-4723

BATHROOM Sento Floor-Mounted Tub Filler G-6354-LM42N





Information

- Floor-mount installation
- Aerated spout flow rate ~8 gpm @ 45 psi
- Aerated handshower flow rate \leq 1.5 max gpm
- 7-7/8" spout reach
- 30" to 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Finishes



Unfinished Brass

Unfinished Architectural Brushed Brass White





Product Features

- Floor-mount installation
- Aerated flow rate ~ 8 gpm @ 45 psi
- Handshower flow rate ≤ 1.5 max gpm
- 7-7/8" spout reach
- 30" to 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve


Available Finishes

- Polished Chrome
 G-6354-LM42N-PC
- Polished Nickel
 G-6354-LM42N-PN
- Olive Bronze*
 G-6354-LM42N-OB*
- Steelnox ®
 G-6354-LM42N-SN
- Unfinished Brass* G-6354-LM42N-UB
- Architectural Black*
 G-6354-LM42N-BK*
- Architectural White*
 G-6354-LM42N-WT*
- Brushed Gold*
 G-6354-LM42N-BAU*

Warranty

Limited lifetime warranty

For complete warranty information go to http://www.graff-designs.com/en/info/faqs

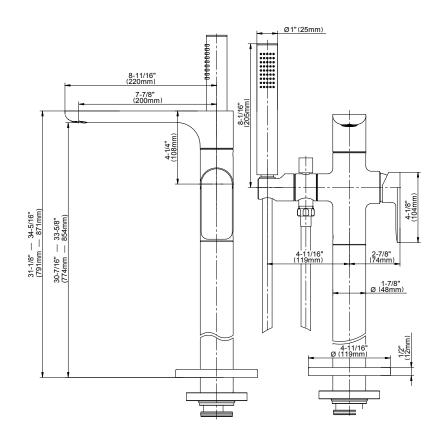

The measurements shown are for reference only. Products and specifications shown are subject to change without notice. Revised 11/2017. <u>www.graff-designs.com</u> | phone: 800-954-4723

^{*} Special order finish- call for availability