



Under-Mount Kitchen Sink W/Short Apron K-5664

Features

- Fits minimum 24-inch base cabinet width.
- Single bowl.
- 9-inch depth.
- Shortened apron allows sink to be used in most standard cabinetry or retrofitted to existing standard cabinetry.
- Self-Trimming apron overlaps the cabinet face for easy installation and beautiful results.
- No faucet holes.
- Center drain.
- Includes cutout templates.

Material

KOHLER® enameled cast iron.

Installation

Under-mount apron-front.

Recommended Products/Accessories

K-9000 P-Trap

K-8395 Sink Rack

K-6377 Sponge Caddy

K-6378 Kitchen Brush Caddy

K-6379 Kitchen Squeegee

K-6382 Disinfecting Wipes Dispenser

K-6383 Soap Dispenser

K-8618 Paper Towel Holder

K-8619 Flexible Kitchen Mat

K-8624 Dish Scraper

K-8801 Sink Strainer

K-8799 Sink Strainer

Included Components

Additional Components:

Cutout templates



Codes/Standards

ASME A112.19.1/CSA B45.2

KOHLER® Enameled Cast Iron Kitchen Sink Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
565	47	Almond
	FD	Cane Sugar™
	NY	Dune
	95	Ice™ Grey
100	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	FT	Basalt
	58	Thunder™ Grey
	20	Suede
	KA	Black 'n Tan
* n	FP	Caviar
	7	Black Black™







Under-Mount Kitchen Sink W/Short Apron K-5664

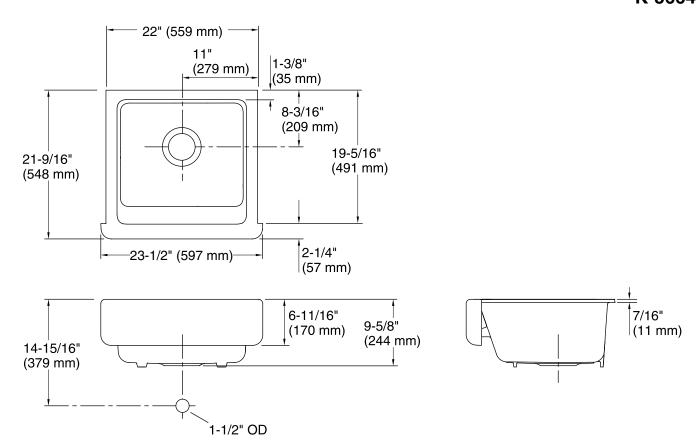

Technical Information

All product dimensions are nominal.

Bowl configuration: Single

Installation: Under-mount Min. base cabinet 24" (610 mm)

width:

Bowl area (Only): Length: 18-13/16" (477 mm)

Width: 18-1/16" (459 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)

Drain hole: 3-5/8" (92 mm)

Template: 1247776-7, required, included

1239229-7, required, included

Notes

Install this product according to the installation instructions.

NOTICE: Countertop manufacturer or cutter must use the current product template available at www.kohler.com, or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cutout template is used. IMPORTANT! The distance from the top edge of the cabinet to the top of the cabinet door must be at least 6-7/8" (175 mm) to install this sink.

