# **KOHLER**<sub>®</sub>

# LuxStone® Frameless sliding shower door K-706168-L

#### Features

- Dual-sliding barn door style.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Cushioned center guide provides smooth, quiet sliding action.
- Gently curved towel bars and knob combination offers storage without encroaching on the bathing space.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

#### Material

• Frameless, 5/16" (8mm) thick Crystal Clear tempered glass.

#### Installation

- Sliding shower door.
- Not for use in hospitality.
- For residential use only.

#### **Included Components**

Product consists of: 706268-L 706368-L Additional Components: Hardware kit



#### Codes/Standards ANSI Z97.1 CPSC 16CFR 1201

#### KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description



- HP Bright Polished Silver
- NX Brushed Nickel
  - ABZ Anodized Dark Bronze
  - BL Matte Black


# Available Glass Options

- Code Description
  - L Crystal Clear





## LuxStone® Frameless sliding shower door K-706168-L

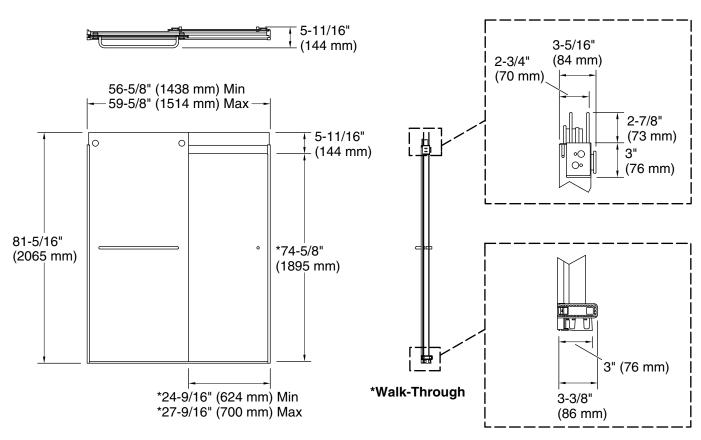

#### **Technical Information**

All product dimensions are nominal.

Installation type: Opening style:	For shower base installation Sliding/Bypass
Opening Width - Min:	56-5/8" (1438 mm)
Opening Width - Max:	59-5/8" (1514 mm)
Walk-through - Min:	24-9/16" (624 mm)
Walk-through - Max:	27-9/16" (700 mm)
Base-To-Wall Radius – Max:	1/2" (13 mm)
Glass thickness:	5/16" (8 mm)
Glass coating:	CleanCoat®

#### Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 84-1/2" (2146 mm) to allow for installation clearance.

