ALL MODELS

LACAVA

Specifications:

Installation: built-in wall mount **Exterior Dimensions:** W: 2 3/4" H: 2 3/4"


Material: solid brass construction ceramic

cartridge

Water use: 7.4 GPM (43.5 PSI)

Finishes: per each faucet line

Fittings included: 2-way diverter : rough-in # VD2




Features:

- 2-way diverter valve (14D2.S.S) with OFF function
- square or round backplate
- multiple handles to match the thermostatic valve
- 2-way diverter operating angle 45°, total turning angle 90°
 (outlet B and C) with OFF function between
 Turning clockwise opens C outlet, counter-clockwise opens B outlet
- 1/2" NPT water IN and OUT connections
- 1" extension kit available


Codes + Standards:


- Meets and exceeds applicable national codes and standards
- CAL-Green compliant



Recommended Items:

- Replacement parts:
 - VD2 rough-in for 2-way diverter
 - R033 ceramic cartridge for 2-way diverter
 - VD2-EX 1" extension kit





LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.

Revised: 11/06/2019

LACAVA

built-in 3-way diverter ALL MODELS

Specifications:

Installation: built-in wall mount

Exterior Dimensions: Ø 2 3/4"

Material: solid brass construction ceramic

cartridge

Water use: 10 GPM (43.5 PSI)

Finishes: per each faucet line


Fittings included: 3-way diverter: rough-in # VD3

Features:

- 3-way diverter valve (15D3.L.R) with OFF function
- square or round backplate
- multiple handles to match the thermostatic valve
- 3-way diverter operating angle 60°, total turning angle 360° (outlet A, B, and C)
- 1/2" NPT water IN and OUT connections
- 1" extension kit available


Codes + Standards:


- Meets and exceeds applicable national codes and standards
- CAL-Green compliant




Recommended Items:

- Replacement parts:
 - VD3 rough-in for 3-way diverter
 - VD3-C ceramic cartridge for 3-way diverter
 - VD3-EX 1" extension kit








LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.

Revised: 11/06/2019



REVIEW BEFORE INSTALLATION

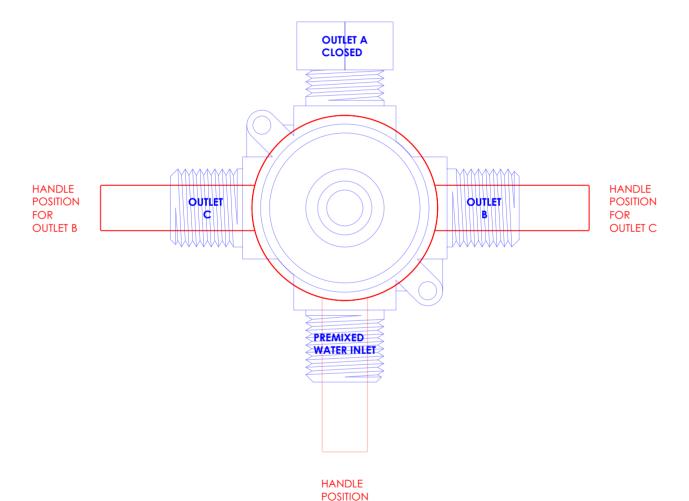

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Cabinets with 'vanity top' sinks are made to the matching sink and dimensions may vary. LACAVA is not responsible for any cutouts, countertops, or furniture made without the actual product or template. Differences in color, grain, appearance, and texture are inherent in all natural woodwork and should be expected. Variances in these qualities are not deemed manufacturing defects and will not be accepted as valid reasons for return or exchanges. Plumbing specifications are only a guideline and may need alteration based on application.

FOR OFF


6630 WEST WRIGHTWOOD CHICAGO, IL 60707 PH: 773-637-9600 LACAV FAX: 773-637-9601 INFO@I

LACAVA.COM INFO@LACAVA.COM



REVIEW BEFORE INSTALLATION

VD3

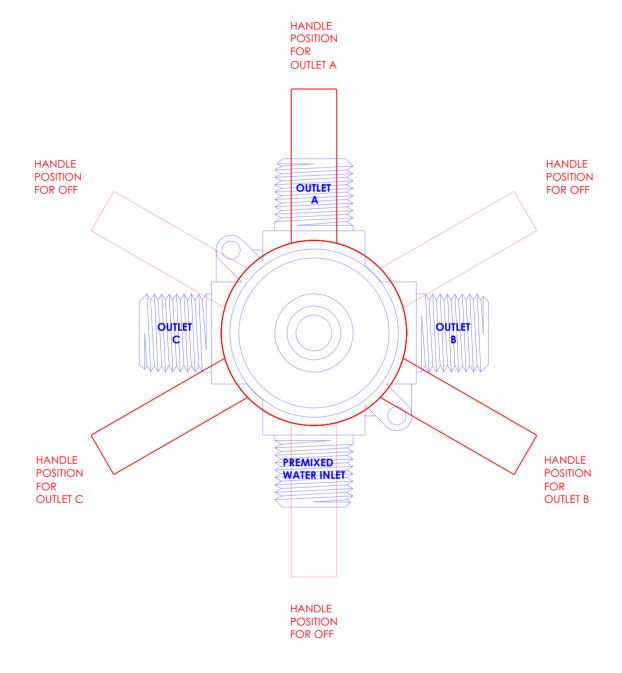

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Cabinets with 'vanity top' sinks are made to the matching sink and dimensions may vary. LACAVA is not responsible for any cutouts, countertops, or furniture made without the actual product or template. Differences in color, grain, appearance, and texture are inherent in all natural woodwork and should be expected. Variances in these qualities are not deemed manufacturing defects and will not be accepted as valid reasons for return or exchanges. Plumbing specifications are only a guideline and may need alteration based on application.

PH: 773-637-9600

FAX: 773-637-9601