

# INSTALLATION GUIDE

(Vessel Bath)

Required  
Tools




## ATTENTION

This product requires professional installation. Please provide your countertop fabricator with this information. Please observe all state and local building and plumbing codes.

## CUSTOM INSTALLATION


Vessel sinks require custom installation based upon desired sink placement.

**ACTUAL VESSEL SIZE AND SHAPE MAY VARY.**  
Universal Vessel Instructions



## WARNING

Before installation, please inspect your product for any damage that may have occurred during shipping. If the product was damaged in the shipping process or your product needs to be returned for another reason, it must be in the original packaging. If the product is not returned with the original packaging you may not be eligible for a refund of the purchase price. Return fees may apply. Please contact your dealer for more information.



## HOMEOWNERS

Please read before installation.

## NEW INSTALLATION

When preparing for installation, it is recommended that you consult with your countertop fabricator as to your installation preference.

## REPLACEMENT

If replacing a vessel sink with an undermount pre-existing hole, make sure that the base of the model you have chosen is larger than the existing hole. This will allow for any adjustments that might be needed for the installation process. Make sure that the base is large enough to secure safely to the existing countertop.

## WHAT'S INCLUDED

VITREOUS CHINA VESSEL BOWL



## WHAT'S NOT INCLUDED

Silicone Sealant/Adhesive

## Step: 1

### COUNTER AND SINK PREPARATION


1. Dry fit the sink in the desired location. Make sure to leave at least 5" at the rear of the vanity for a faucet. Trace the drain hole.
2. Remove sink and mark center point of drain using the new outline.
3. Create a 5" diameter hole cut-out using the same center point.
4. Use appropriate cutting tool for use with specified counter material.



## Step: 2

### INSTALLATION

1. Flip the sink over.
2. Apply a continuous bead of silicone sealant / adhesive specifically designed for plumbing applications to the top side of the rim.
3. Flip the sink back over. Line up the drain hole and the cut-out. Press firmly on the sink to form a tight bond between the sink and countertop.
4. Install drain and faucet to manufacturers specifications.

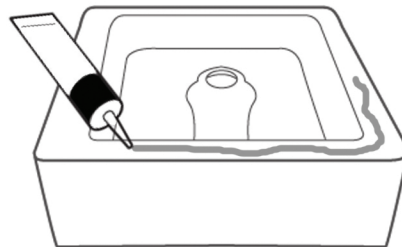

## Step: 3

### MAINTENANCE

To clean, please use common cleaners designed for bathroom sanitary-ware.

This product is made from vitreous china with a porcelain enamel glaze. The product is designed to handle normal everyday cleaning. It is not designed to withstand large objects dropped from height. This will potentially crack or shatter the bowl of the sink.

Please see the dealer warranty for more details