

# **VESPERA**

### **Features**

- Solid brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valve cartridges
- Two-valve, inlet/outlet flow control design
- ADA compliant transitional lever handles
- Double-pivot spout with aerated flow
- 15/16" (2.4 cm) spout downward offset from wall inlet center
- 22-5/8" (57.5 cm) pivoting spout reach from inlet valve (c-c)
- 3-9/16" (9.0 cm) pivoting inlet valve offset (wall-center)
- For single hole, wall-mounted configurations

## **Codes / Standards Compliance**

Meets or exceeds the following at date of manufacture:


- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- IPC
- NSF 61
- ADA
- ICC/ANSI A117.1
- All applicable US Federal and State material regulations

### **Wall-Mounted Pot-Filler Faucet**

2500-5503





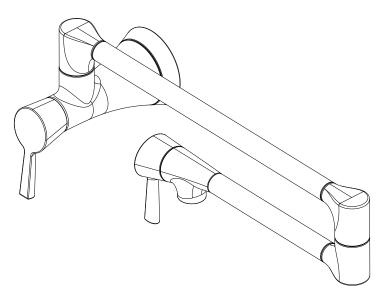

### **Colors / Finishes**

10B: Oil Rubbed Bronze15: Polished Nickel15A: Antique Nickel26: Polished Chrome

• Other: Refer to the Newport Brass catalog for additional color/finish options.

# Specified Model Model Description Colors / Finishes 2500-5503 Wall-Mounted Pot-Filler Faucet 10B 15 15A 26 Other

## **Product Specification:**

#### Add "Color / Finish" suffix to Model number, below.

The Pot-Filler Faucet shall be made of solid brass construction. Faucet shall incorporate a double-pivot spout with aerated flow and a feature brass valve bodies with quarter-turn washerless ceramic disc valve cartridges. Pot-filler Faucet shall be a two-valve, inlet/outlet flow control design accommodating single-hole, wall-mounted configurations. Product shall incorporate a 15/16" (2.4 cm) spout downward offset from wall inlet center and a 22-5/8" (57.5 cm) pivoting spout reach from inlet valve (c-c). Pot-Filler Faucet pivot axis (inlet valve center) offset shall be 3-9/16" (9.0 cm) (wall-center). Faucet shall incorporate ADA compliant transitional lever handles. Pot-Filler Faucet shall be Newport Brass Model 2500-5503/\_\_\_\_.

# 2500-5503

# **Product Dimensions** (units are in inches)

