

COMMAND THE ROOM

Brizo Voice Activation Technology allows you to dispense the exact amount of water you need, completely hands-free. Just command your faucet to turn on and off, warm the water, dispense a metered amount or create custom container amounts—luxury answers to you.

MATERIALS REQUIRED

These instructions begin with an installed Brizo SmartTouch® faucet*. If you have not installed your faucet yet, please follow the instructions for faucet installation prior to installing your Brizo VoiceIQ™ Module. You will also need a smartphone or tablet and the following to complete the set-up:



A POWER SOURCE

Under the sink.
Not controlled by a switch.



A CONNECTED HOME DEVICE

Amazon® Alexa® or
Google® Assistant.



A HOME WI-FI SYSTEM


And your login
information.

Before you begin, remove the batteries from your SmartTouch® solenoid.

For more product details, installation assistance and other helpful information, visit
brizo.com/voiceactivation.


**manufactured after 01/01/18*

INSTALLATION INSTRUCTIONS

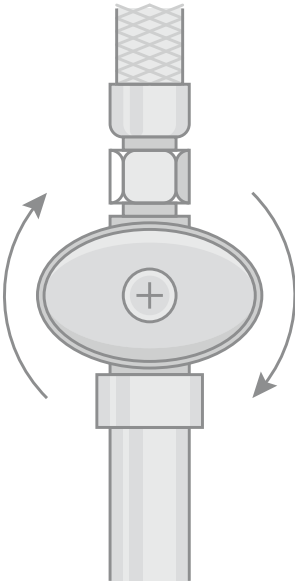


STEP 1.

Turn off your water supply.

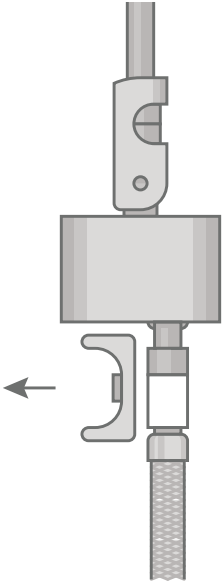


STEP 2.

Remove the plastic clip from the bottom of your existing solenoid.

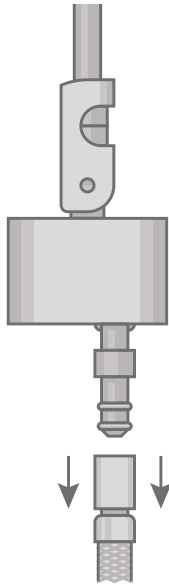


STEP 3.

Remove the existing hose by gently pulling it downward.

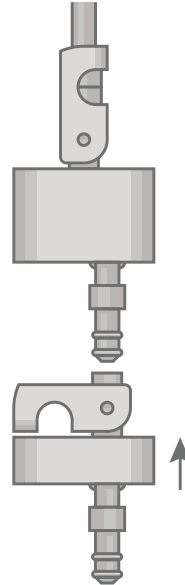


STEP 4.

Slide the new VoicelQ™ Module unit onto the bottom of your existing solenoid.

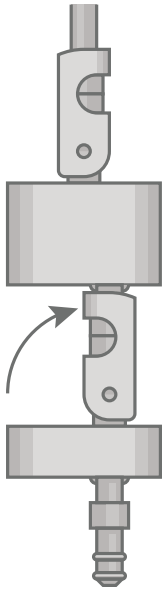


STEP 5.

Swivel the retainer clip upward and click it into place.

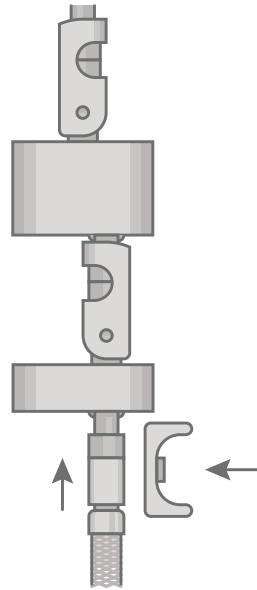


STEP 6.

Slide the hose onto the VoicIQ™ Module and secure it with the retaining clip.

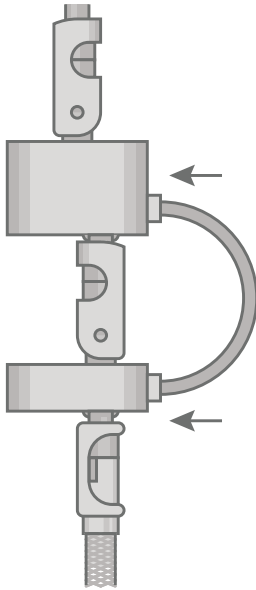

STEP 7.

Connect the ethernet cable to the voice module and the existing solenoid.

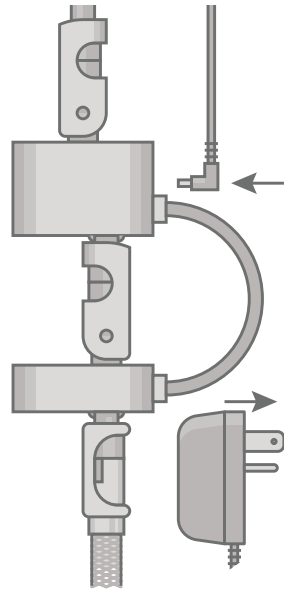

STEP 8.

Connect the power supply to the solenoid and to an outlet that is not controlled by a switch. Reinstall SmartTouch® solenoid batteries* and turn on water supply.

** in case of power outage, touch activation will revert to battery power.*

BRIZO®

104181 Rev. A 03/12/2019

INSTALLATION INSTRUCTIONS (CON'T)



Connect your Smartphone or tablet to your VoicelQ™ Module's Wi-Fi signal, "**BRIZO-ABC**". Your VoicelQ™ Module will have a unique identifier in the name of the Wi-Fi connection, shown here as "ABC"



Open a browser and enter the URL **10.10.10.1** for product setup. Follow the steps on screen.



Bookmark **device.brizo.com** for easy access to the Web app, where you can see settings, FAQs and a list of voice commands.

VOICEIQ™ MODULE LED COLOR INDICATORS

This light can be found on your VoiceIQ™ Module under the sink, not at the faucet base.



BLINKING GREEN

Wi-Fi setup mode: indicates the VoiceIQ™ Module is trying to connect to Wi-Fi. If blinking continues for more than 3 minutes, you may need to reconnect it to your home Wi-Fi.



BLINKING RED

Indicates that the required AC power is not connected (blinks once every 5 seconds).



SOLID GREEN

Indicates a successful connection to the Wi-Fi.



SOLID RED

Indicates an interrupted or failed connection.

TROUBLESHOOTING TIPS

If your VoicelQ™ Module is blinking a red light every 5 seconds, this indicates an issue with the power supply. Verify that the outlet you've plugged your module into isn't connected to your garbage disposal switch by plugging something else into the outlet (lamps and other lights work best, but anything that lights up or makes noise and doesn't have a backup battery will work), then switching your garbage disposal on and off. If the item plugged into the outlet only works with the garbage disposal switched on, your outlet is connected to your garbage disposal and isn't compatible with your VoicelQ™ Module.

If you can't locate BRIZO-ABC on your list of available Wi-Fi networks, check for a flashing green light on your VoicelQ™ Module under the sink. If the light is blinking green, re-scan for Wi-Fi networks on your mobile device. If the light is blinking red, see the above troubleshooting tip about power supply.

If the VoicelQ™ Module setup page fails to load on your mobile device after entering 10.10.10.1, check the following:

- A.** If the LED light on your VoicelQ™ Module is blinking green, it's still in Wi-Fi setup mode. Re-scan for Wi-Fi networks on your mobile device and connect to "Brizo-ABC" ("ABC" is used here to mark your module's unique identifier code).
- B.** If the LED light on your VoicelQ™ Module is blinking red, it isn't connected to a power source. See the first troubleshooting tip, above.
- C.** Turn off cellular data on your mobile device, but leave Wi-Fi on, then refresh the webpage.

TROUBLESHOOTING TIPS (CON'T)

If device fails to connect after entering Wi-Fi network name and password and the LED on voice module is solid red, check the following:

- A.** Double check that the password for your VoicelQ™ Module's Wi-Fi was entered correctly.
- B.** The VoicelQ™ Module works with 2.4 GHz Wi-Fi. If your router has both 2.4 GHz and 5.0 GHz, please make sure you use 2.4 GHz. When scanning for Wi-Fi networks on your mobile device, only the 2.4 GHz network will appear.

CONTINUOUS SUPPORT

We're here to help. You'll find a full list of frequently asked questions at **device.brizo.com**. You're also welcome to call our customer solutions line at **833-297-8482**.

For warranty information visit
www.brizo.com/customer-support/warranty-and-returns

The VoicelQ™ Module is designed to work with Brizo SmartTouch® Faucets manufactured after 01/01/2018.

VOICE ACTIVATION

by **BRIZO**[®]