

## **Underscore® Oval**

65-1/2" x 35-5/8" drop-in VibrAcoustic® bath **K-5716-VB** 

#### **Features**

- VibrAcoustic calms and soothes with sound vibration technology.
- Six concealed speakers send sound waves through the water to gently massage the body.
- Six original instrumental compositions offer different levels of relaxation.
- Syncs with devices enabled with BLUETOOTH® wireless technology including smartphones, MP3 players, tablets, and laptops located up to 33 feet away.\*
- Customize your experience with the high-resolution color touch screen.
- Fully-adjustable volume above and below the water.
- Functions as a hydrotherapy bath when full of water and a stereo system when empty.
- Integral lumbar support.
- Oval basin creates a spacious bathing experience.
- Slotted overflow allows for deep soaking.
- Includes 25' of wiring and amplifier.
- Center drain.

### Material

Acrylic.

### Installation

- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).
- Drop-in or undermount.
- Requires 110 V electrical service.

### **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### **Recommended Products/Accessories**

K-883 Under-Mount Installation Kit K-23726 Drain treatment K-23732 Tub & shower cleaner



### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2

# **KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty**

See website for detailed warranty information.

The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

### **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder™ Grey
4.55	7	Black Black™



# **KOHLER**®

# **Underscore® Oval**

65-1/2" x 35-5/8" drop-in VibrAcoustic® bath **K-5716-VB** 

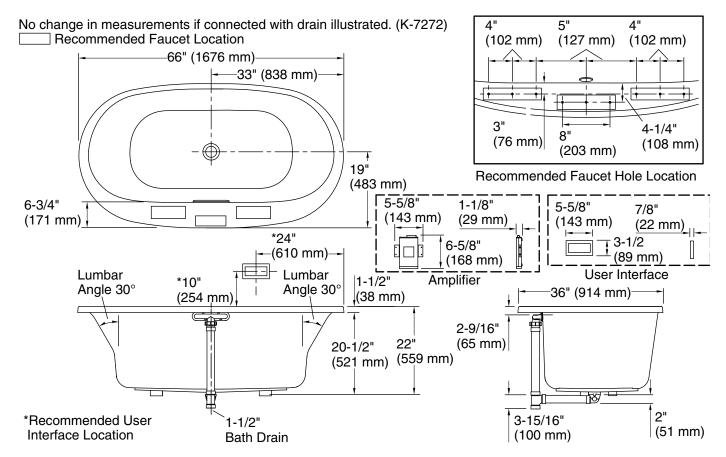

## **Required Electrical Service**

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Amplifier: 120 V, 15 A, 50/60 Hz

#### **Technical Information**

All product dimensions are nominal.

Installation: Drop-in, Under-mount

Drain location: Center

Basin area, bottom: 47" x 26-1/4" (1193 mm x 666 mm)

Basin area, top: 61-3/16" x 28-3/8" (1554 mm x 721 mm)
Weight: 95 lbs (43.1 kg)

Weight: 95 lbs (43.1 kg)

Minimum floor load: 52 lbs/ft² (253.9 kg/m²)

Water depth: 17-9/16" (446 mm)

Water capacity: 85.5 gal (323.7 L)

Template: Drop-in, 1268439-7, required, included Electrical component Amplifier: 120 V, 1.1 A, 50/60 Hz

rating:

Amplifier channels: 2 at 15 W per channel

2 at 30 W per channel

Bluetooth® range: 33 ft (0.8 m)

### **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

IMPORTANT! Due to BLUETOOTH signal overlap, installations of multiple baths within 50 ft (15.2 m) of each other will require special order product. Please contact your dealer, showroom, or sales representative for ordering assistance.

